DISTRIBUTOR
PRODUCT BROCHURE
2019

5TH EDITION 04.01.19

ACCESS ALL AREAS

PANEL CODE KEY

Code Structure

1	2	3	4	5	6
Panel Range	Fire Rating	Door Type	Frame Type	Lock Type	Special Attributes

1 Panel Range
From our FlipFix range to our standard EX ranges

FF — FlipFix Fitting Device
This panel comes equipped with the FlipFix Fitting Device
FF

01 UP TO 51 — EziFit Hinge System
This panel comes equipped with EziFit Hinge System
EX01 ... EX51

2 Fire Rating
Up to 3 hours fire rating, higher ratings available upon request

Non Fire Rated — This panel is not fire rated
000

1 Hour Fire Rating — This panel is fire rated up to 1 hour
060

2 Hour Fire Rating — This panel is fire rated up to 2 hour
120

3 Hour Fire Rating — This panel is fire rated up to 3 hour
180

3 Door Type
Multiple door types for all your needs

MD — Metal Door
This is a metal panel
MD

PD — Plasterboard Door
This panel is made out of Plasterboard
PD

TD — Tile Door
Tile Door Panel
TD

PL — Plastic Door
Plastic panel, no lock required
PL

4 Frame Type
Our FlipFix range now comes with the Mitreless picture frame, for a better, cleaner look

Beaded Frame — 25mm beaded frame suitable for plastering in for a discrete finish
BF

Picture Frame — Picture frame to rest on top of the plaster for a visible finish
PF

5 Lock Type
Various lock types are available on request. May not be suitable for some panels

Budget Lock — BL

Key Retaining Lock — IP65

Touch Catch — TC

5mm Bit — 5B

3 Point Euro Cylindar Lock — 3WEP

3 Way Lock — 3W

Castellated Key Lock — CTL

Slotted Lock — STL

Tamper Proof Lock — SL

Turn Screw Lock — TS

6 Special Attributes
These special attributes will sit on the end of the code
Icons in gray will have no effect on the code structure and are just for description purposes

Air Tight Rating — This panel is air tight
AT

Acoustic Rating — This panel is acoustic rated
30A

Circular Panel — This panel is circular
CIR

Primed RAL 9010 — Primed for on site decoration or used as a matt
PR

Part L Compliant — This panel is part L compliant
Part L Compliant

Smoke Insulation — This panel was tested in accordance with BS EN 1634-3: 2004.
Smoke

EZ EziFit Hinge System — This panel comes with the EziFit hinge system
EZ

Thermal Insulation — materials used to reduce the rate of heat transfer
Insulated

FLIPFIX

What is the Flipfix Fitting Device?

• There is no longer any need for bracings or supports, and no extra screws or glue are required, you simply follow the fitting instructions, close the door and walk away.

• A construction project requiring 300 no 600mm x 600mm Access Panels would save up to **40 HOURS** on fitting time Compared to its predecessor. That amounts to reducing the time spent on site by one whole week, which should hopefully reflect in future tender submissions.

History:

● Launched in 2015, our unique and patented fitting system has proved to be a market leader in the UK by reducing fitting times on site by as much as **80%**.

● Since its inception almost **98%** of our customers, new and old, have flipped' to the **FLIPFIX** range of Inspection Panels and are making incredible savings on both time and cost.

● This clever fitting device is incorporated into the fixing frame of the panel and operated using a standard drill (on torque 3). The device will glide along the positioning screw until it bites securely into the back of the surround and can fit any depth from 8mm to 32mm - So easy!
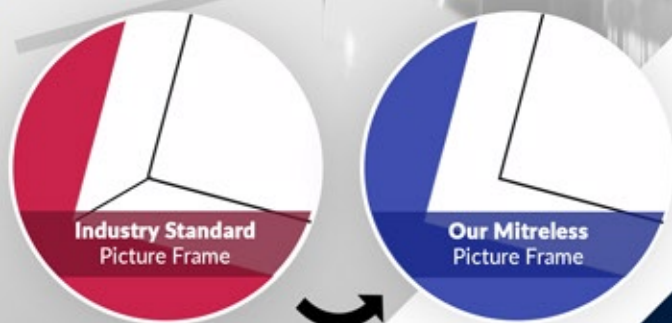
Mitreless Frame

Seamless Frame

Only available on stock FlipFix Metal Panels

Reduces Snagging and bending

Better and cleaner look

Industry Standard
Picture Frame

Our Mitreless
Picture Frame

Scan me for
fitting video

FLIPFIX

Metal Door
Dual Purpose

Benefits

- **Dual Purpose** - Suitable for installation in to both walls and ceilings.
- **Fire Rating** - Available up to 2 hours Fire Rated.
- **Acoustic Rating** - Coming Soon!
- **Airtight Rating** - Coming Soon!
- **Frame Types** - Picture Frame or Beaded Frame.
- **Lock Type** - Budget lock as standard (other locks are available).
- **Finish** - RAL 9010 30% Gloss White (Other colours available)
- **Installation** - The unique FlipFix Fitting Device (No need for wood or metal supports, screws or glue).
- Supplied with cut out template as standard.
- Saves up to 80% on fitting times.

FF/000/MD/PF/BL
Non Fire Rated

FF 000 MD PF BL

Sizes	RRP (£)	Your Price (£)	Recommended selling price		
			1 - 100	100 - 1000	1000+
150 x 150mm	25.00	8.50	12.50	11.25	10.65
200 x 200mm	27.50	9.25	13.75	12.25	11.75
300 x 300mm	30.50	11.25	15.25	13.75	12.95
450 x 450mm	39.50	15.50	19.75	17.75	16.75
550 x 550mm	48.50	19.50	24.25	21.95	20.75
600 x 300mm	39.50	15.00	19.75	17.75	16.75
600 x 600mm	51.00	19.75	25.50	22.95	21.50
900 x 600mm	113.00	45.20	56.50	50.85	49.00
1200 x 600mm	130.00	52.00	65.00	58.50	56.00

Features

Metal Faced Dual Purpose Panel
Non Fire Rated
Picture or Beaded Frame
Plastic Flipfix Fitting Device
RAL 9010 (30% Gloss White)
Budget Lock

FF/060/MD/PF/BL
1 Hour Fire Rated

FF 060 MD PF BL

Sizes	RRP (£)	Your Price (£)	Recommended selling price		
			1 - 100	100 - 1000	1000+
150 x 150mm	37.50	10.00	18.75	16.87	16.12
200 x 200mm	50.00	11.00	25.00	22.50	21.50
300 x 300mm	53.00	13.95	26.50	23.85	22.79
450 x 450mm	62.00	18.95	31.00	27.90	26.66
550 x 550mm	71.00	20.95	35.50	31.95	30.53
600 x 300mm	62.00	18.95	31.00	27.90	26.66
600 x 600mm	76.00	22.95	38.00	34.20	32.68

Features

Metal Faced Dual Purpose Panel
1 Hours Fire Rated
Picture or Beaded Frame
Metal Flipfix Fitting Device
RAL 9010 (30% Gloss White)
Budget Lock

Scan for Fire Test PDF

Other attributes available upon request:

120   BF   More locks available

- £12.00 carriage charge on all orders under £100
- All prices are excluding VAT

Fitting Video

FLIPFIX

Plasterboard Door
Dual Purpose

Benefits

- **Dual Purpose** - Suitable for walls and ceilings.
- **Fire Rating** - Available up to 1 hour Fire Rated.
- **Acoustic Rating** - Coming Soon!
- **Airtight Rating** - Coming Soon!
- **Frame Types** - Beaded Frame (Picture frame not recommended).
- **Lock Type** - Budget lock as standard (other locks are available).
- **Finish** - RAL 9010 30% Gloss White, with Plasterboard Infill.
- **Installation** - The unique FlipFix Fitting Device (No need for wood or metal supports, screws or glue).
- Supplied with cut out template as standard.
- Saves up to 80% on fitting times.
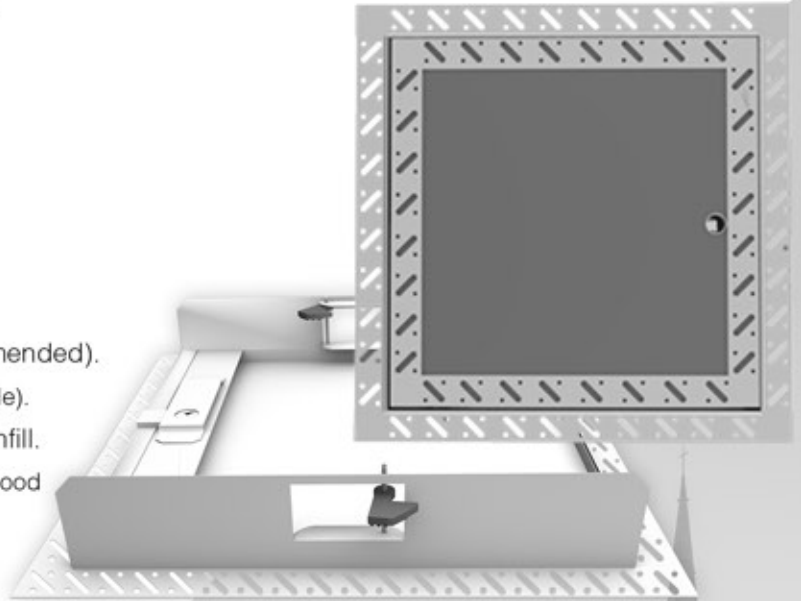
FF/000/PD/BF/BL
Non Fire Rated

FF 000 PD BF BL

Sizes	RRP (£)	Your Price (£)	Recommended selling price		
			1 - 100	100 - 1000	1000+
150 x 150mm	45.00	16.34	22.50	20.25	19.15
200 x 200mm	47.50	17.25	23.75	21.38	20.20
300 x 300mm	54.00	20.00	27.00	24.30	22.95
450 x 450mm	70.00	26.00	35.00	31.50	29.75
550 x 550mm	76.00	29.00	38.00	34.20	32.30
600 x 300mm	68.00	26.00	34.00	30.60	28.90
600 x 600mm	80.00	29.00	40.00	36.00	34.00

Features

Plasterboard Faced Dual Purpose

Beaded Frame, Beaded Door

Non Fire Rated

Flipfix Fitting Device

Budget Lock

FF/060/PD/BF/BL
1 Hour Fire Rated

FF 060 PD BF BL

Sizes	RRP (£)	Your Price (£)	Recommended selling price		
			1 - 100	100 - 1000	1000+
200 x 200mm	74.00	27.95	37.00	33.30	31.45
300 x 300mm	80.00	29.00	40.00	36.00	34.00
450 x 450mm	102.00	39.00	51.00	45.90	43.35
550 x 550mm	120.00	45.00	60.00	54.00	51.00
600 x 300mm	96.00	39.00	48.00	43.20	40.80
600 x 600mm	126.00	50.00	63.00	56.70	53.55

Features

Plasterboard Faced Dual Purpose

Beaded Frame, Beaded Door

1 Hour Fire Rated

Flipfix Fitting Device

Budget Lock

Scan for Fire Test PDF

Other attributes available upon request:

More locks available

Fitting Video

- £12.00 carriage charge on all orders under £100
- All prices are excluding VAT

FLIPFIX

Circular Panel
Ceiling only

Benefits

- **Dual Purpose -** Suitable for installation in to ceilings only.
- **Fire Rating -** Available up to 3 hours Fire Rated.
- **Acoustic Rating -** Coming Soon!
- **Airtight Rating -** Coming Soon!
- **Frame Types -** Picture Frame.
- **Lock Type -** Turn screw lock.
- **Finish -** RAL 9010 30% Gloss White
- **Installation -** The unique FlipFix Fitting Device
  (No need for wood or metal supports, screws or glue).
- **Supplied with cut out template as standard.**
- **Saves up to 80% on fitting times.**

FF/000/MD/PF/TS/CIR
Non Fire Rated

FF	000	MD	PF	TS	CIR

Sizes	Standard RRP (£)	Features
200dia	49.00	Metal Faced, Dual Purpose
300dia	59.00	Non Fire Rated
		Picture Frame
		Flipfix Fitting Device
		Turn Screw Lock

FF/180/MD/PF/TS/CIR
3 Hour Fire Rated

FF	180	MD	PF	TS	CIR

Sizes	Standard RRP (£)	Features
200dia	59.00	Metal Faced, Dual Purpose
300dia	69.00	3 Hours Fire Rated
		Picture Frame
		Flipfix Fitting Device
		Turn Screw Lock

Scan for Fire Test PDF

Fitting Video

- £12.00 carriage charge on all orders under £100
- All prices are excluding VAT

FLIPFIX

Tile Door
Wall only
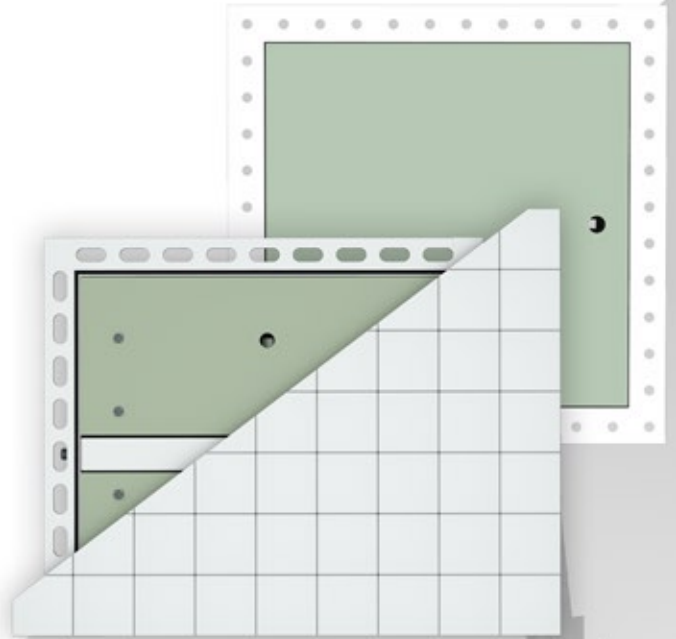
Benefits

- **Walls Only -** Suitable for installation in walls only.
- **Fire Rating -** Non Fire Rated
- **Acoustic Rating** - Not available
- **Airtight Rating** - Not available
- **Frame Types -** Beaded Frame (Picture frame not recommended).
- **Lock Type -** Budget lock as standard (other locks are available).
- **Finish -** RAL 9010 30% Gloss White, with Moisture Board Infill.
- **Installation -** The unique FlipFix Fitting Device (No need for wood or metal supports, screws or glue).
- **Saves up to 80% on fitting times.**

FF/000/TD/BF/BL
Non Fire Rated

| FF | 000 | TD | BF | BL |

Sizes	Standard RRP	Features
200 x 200mm		Moisture Board, Infill
to	POA	Non Fire Rated
600 x 600mm		Beaded Frame
		Flipfix Fitting Device
		Budget Lock

No Fitting
Video
Available

EX15 Plastic Access
Dual Purpose

Benefits

- **Dual Purpose -** Suitable for installation in both walls and ceilings.
- **Fire Rating -** Non Fire Rated.
- **Acoustic Rating -** No rating available
- **Airtight Rating -** No rating available
- **Frame Types -** Picture Frame.
- **Lock Type -** No Lock.
- **Finish -** Textured Finish.
- **Installation -** Standard Installation.

EX15/000/PL/PF/NL
Non Fire Rated - **Dual Purpose**

	15		PL	>	
	EX15	000	PL	PF	NL

Sizes	Standard RRP (£)	Your Price (£)	Features
152 x 102mm	7.25	1.80	Plastic Faced Access Panel
228 x 152mm	12.35	3.20	No Fire Rating
203 x 203mm	12.80	3.08	Picture Frame
305 x 305mm	15.35	3.83	Quick And Easy Installation
355 x 355mm	20.50	5.13	

Non Fire Rated - **Wall Only**

Sizes	Standard RRP (£)	Your Price (£)	Features
457 x 457mm	31.00	9.95	Plastic Faced Access Panel
560 x 560mm	42.10	19.88	No Fire Rating
			Picture Frame
			Quick And Easy Installation

No Fitting
Video
Available

- £12.00 carriage charge on all orders under £100
- All prices are excluding VAT

EZIFIT

Metal Door
Bespoke

Benefits

- **Dual Purpose -** Suitable for installation in to both walls and ceilings.
- **Fire Rating -** Available up to 2 hours Fire Rated.
- **Acoustic Rating -** Available up to 36dB Rated.
- **Airtight Rating -** Available Airtight.
- **Frame Types -** Picture Frame or Beaded Frame.
- **Lock Type -** 3 way lock as standard (other locks are available).
- **Finish -** RAL 9010 30% Gloss White (Other colours available)
- **Installation -** Ezifit Hinge System saves up to 80% of the time taken to fit an Access Panel.
- **Saves up to 80% on fitting times.**

EX51/000/MD/PF/3W
Non Fire Rated

51	000	MD	PF	3W	EZ
EX51	000	MD	PF	3W	EZ

Sizes - Wall	Sizes - Ceiling	Standard RRP	Features
300 x 300mm	600 x 600mm	POA	Metal Faced Dual Purpose Access Panel
to	to		Non Fire Rated
2400 x 1800mm	1200 x 1200mm		EZIFIT Hinge System
DOUBLE DOOR	DOUBLE DOOR		75mm Deep Frame
			3 Way Lock

EX51/120/MD/PF/3W/36A
2 Hour Fire Rated

51	120	MD	PF	3W	36A	EZ	Smoke
EX51	120	MD	PF	3W	36A	EZ	Smoke

Sizes - Wall	Sizes - Ceiling	Standard RRP	Features
1200 x 300mm	Awaiting	POA	Metal Faced Dual Purpose Access Panel
to	Test		2 Hour Fire Rated
2400 x 1800mm			36dB Acoustic Rated
DOUBLE DOOR			Smoke Tested
			EZIFIT Hinge System
			75mm Deep Frame
			3 Way Lock

Scan for Fire Test PDF

Other attributes available upon request:

AT   BF   More locks available

- £12.00 carriage charge on all orders under £100
- All prices are excluding VAT

Fitting Video

EX01 Metal Door
Slim Fit

Benefits

- **Dual Purpose -** Suitable for installation in to both walls and ceilings.
- **Fire Rating -** Available up to 2 hours Fire Rated.
- **Acoustic Rating -** Available up to 30dB Rated.
- **Airtight Rating -** Available Airtight.
- **Frame Types -** Picture Frame or Beaded Frame.
- **Lock Type -** Budget lock as standard (other locks are available).
- **Finish -** RAL 9010 30% Gloss White
- **Installation -** Traditional fitting method (for more information scan the QR code in the bottom corner of this page)
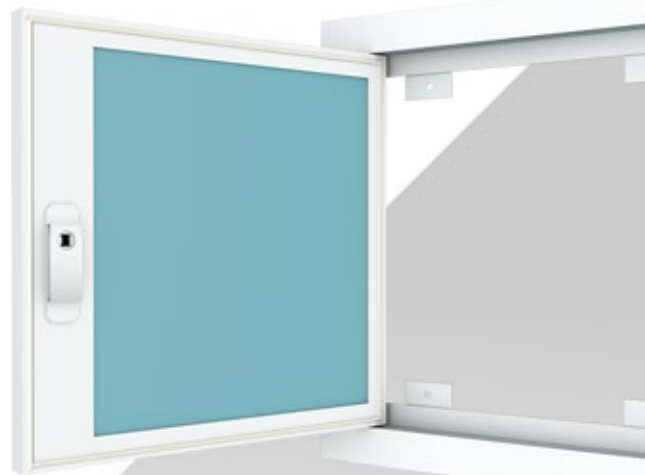
EX01/000/MD/PF/BL
Non Fire Rated

	01		MD		
	EX01	000	MD	PF	BL

Sizes - Wall	Sizes - Ceiling	Standard RRP	Features
150 x 150mm	150 x 150mm		Metal Faced Dual Purpose
to	to	POA	Access Panel
1000 x 1000mm	1000 x 1000mm		Non Fire Rated
SINGLE DOOR	*SINGLE DOOR*		27mm Deep Frame
			Budget Lock

EX01/120/MD/PF/BL
2 Hour Fire Rated

	01		MD			
	EX01	120	MD	PF	BL	Smoke

Sizes - Wall	Sizes - Ceiling	Standard RRP	Features
150 x 150mm	150 x 150mm		Metal Faced Dual Purpose
to	to	POA	Access Panel
1200 x 600mm	1200 x 600mm		2 Hour Fire Rated
SINGLE DOOR	*SINGLE DOOR*		27mm Deep Frame
			Budget Lock

Scan for Fire Test PDF

Other attributes available upon request:

30dB	Airtight	BF	More locks available

- £12.00 carriage charge on all orders under £100
- All prices are excluding VAT

Fitting Video

EX02 Metal Door
Wall Panel

Description

- **Wall Only** - Suitable for installation walls only.
- **Fire Rating** - Available up to 4 hours Fire Rated.
- **Acoustic Rating** - Available up to 46dB Rated.
- **Airtight Rating** - Available Airtight.
- **Frame Types** - Picture Frame or Beaded Frame.
- **Lock Type** - Various lock types available.
- **Finish -** RAL 9010 30% Gloss White
- **Installation -** Traditional fitting method (for more information scan the QR code in the bottom corner of this page)
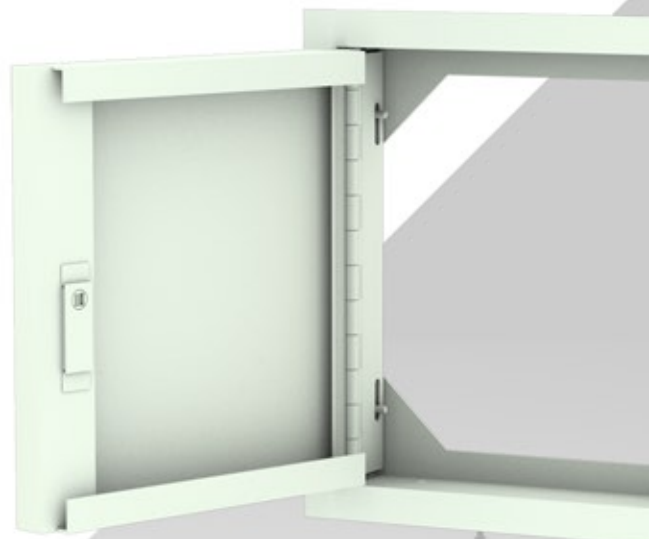
EX02/000/MD/PF/3W/46A/AT
Non Fire Rated

02	000	MD	PF	3W	46A	AT
EX02						

Sizes - Wall	Sizes - Ceiling	Standard RRP	Features
300 x 300mm			Metal Faced wall
to	Not Suitable for Ceiling Application	POA	Access Panel
3000 x 1800mm			Non Fire Rated
Single Door/Double Door			50mm Deep Frame
			3 Way lock

EX02/120/MD/PF/3W/40A/AT
2 Hour Fire Rated

02	120	MD	PF	3W	40A	AT
EX02						

Sizes - Wall	Sizes - Ceiling	Standard RRP	Features
300 x 300mm			Metal Faced wall
to	Not Suitable for Ceiling Application	POA	Access Panel
2600 x 2000mm			2 Hour Fire Rated
SINGLE DOOR			40dB Acoustic Rated
			Airtight
			100mm Deep Frame
			Budget Lock

Scan for Fire Test PDF

Other attributes available upon request:

180	240	BF	More locks available

- £12.00 carriage charge on all orders under £100
- All prices are excluding VAT

Fitting Video

EX12 Metal Door
Loft Hatch

Benefits

- **Ceiling Only -** Suitable for installation ceiling only.
- **Fire Rating -** Available up to 1 hour Fire Rated.
- **Acoustic Rating -** No rating available
- **Airtight Rating -** No rating available
- **Frame Types -** Picture Frame or Beaded Frame.
- **Lock Type -** Various lock types available.
- **Finish -** RAL 9010 30% Gloss White (Other colours available)
- **Installation -** Traditional fitting method

EX12/000/MD/PF/BL
Non Fire Rated

| | 12 EX12 | 000 | MD | PF | BL | L Part L Compliant | Insulated |

Sizes - Wall	Sizes - Ceiling	Standard RRP	Features
Not suitable for Wall Application	450 x 450mm to 1000 x 1000mm **SINGLE DOOR**	POA	Metal Faced wall Access Panel Non Fire Rated 75mm Deep Frame Budget Lock

EX12/060/MD/PF/3W
1 Hour Fire Rated

| | 12 EX12 | 060 | MD | PF | 3W | L Part L Compliant | Insulated |

Sizes - Wall	Sizes - Ceiling		Features
Not suitable for Wall Application	450 x 450mm to 750 x 750mm **SINGLE DOOR**	POA	Metal Faced wall Access Panel 1 Hour Fire Rated 80mm Deep Frame 3 Way Lock

Scan for Fire Test PDF

Other attributes available upon request:

BF   More locks available

- £12.00 carriage charge on all orders under £100
- All prices are excluding VAT

No Fitting Video Available

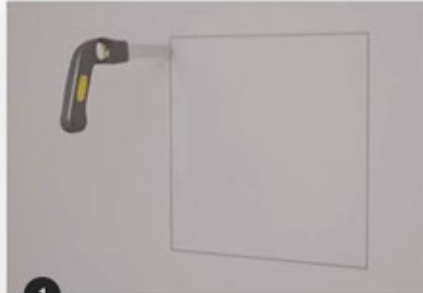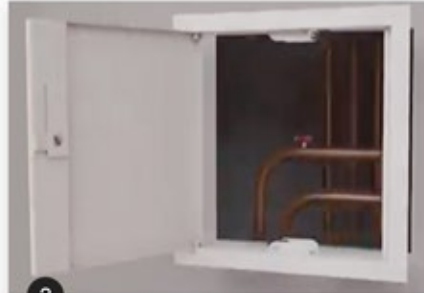# Fitting Instructions

FLIPFIX Metal Door
Dual Purpose

1 Cut your hole in the wall using the template provided.

2 Place the Access Panel into the aperture (no need to remove door or fix supports)

3 Set your drill to torque 3, then screw the FlipFix firmly into position.

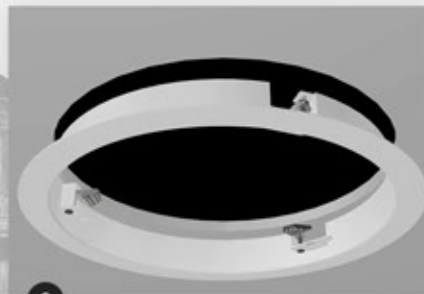*Fitting Video*

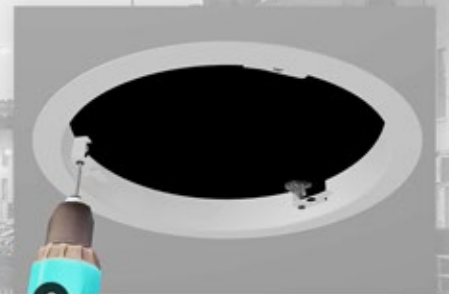## FLIPFIX Circular Door
Dual Purpose

1 Cut your circular hole 5mm bigger in diameter than your panel size.

2 Remove the door, and place the FlipFix frame into your hole ensuring frame is flush with the ceiling.

3 Using a screw gun with it's torque set between 2 and 3, turn the FlipFix screws clockwise until firmly secure.

4 Place the FlipFix door into the frame, and turn it clockwise until it locks into place. Lock the door using the plastic key supplied.

Fitting Video

ACCESS BUDDY SYSTEM

We understand Access Panels can be so confusing! But we are here to help!

What is the **Access Buddy System?**

Your new and improved Panel Selector now offers you the ability to request a callback from us, in order to help you identify the correct Access Panel for your needs.

How to use

Simply click the **SUPPORT** button on your Panel Selector and a member of our handy support team will get back to you right away!

SUPPORT

What else can it do?

As well as that, you can also request callbacks for your customers!

We will call your customer identifying ourselves as an Access Panel specialist. Once we have identified the correct Access Panel for their needs, we will then quote you the product they require.

As easy as:

1. Request a callback for your customer

2. We call your customer and identify the Access Panel they require

3. We quote you their required Access Panel

CHECK OUT OUR NEW AND IMPROVED

PANEL SELECTOR

We understand Access Panels can be so confusing! But we are here to help!

What is the **Panel Selector?**

Your new and improved Panel Selector now offers you the ability to build your own Access Panel, as well as obtain quotes, data sheets and fitting instructions for our most popular ranges of Access Panels.

Access Made Easy

The panel selector is the simplest way of specifying the correct access panel for your requirements.

A simple step-by-step process that asks all the appropriate questions and delivers the most cost effective Access Panel.

Features:

DATASHEETS   FITTING VIDEOS   QUOTE REQUESTS

exitile.panelselector.com   **ACCESS**AllAreas **at Exitile**